

MCD Series

350ps Microchip Laser



MCD series microchip lasers are RealLight's self-developed, passively Q-switched diode-pumped solid-state lasers, featuring stable single pulse energy, excellent beam quality and no tail pulse. The integrated design of diode-pumped module and laser crystal brings convenience to installation and integration due to the compact size. This series provides various wavelengths include 1064nm, 532nm, 355nm and 266nm, and supports internal and external triggering. The internal hermetic module of the laser head is available to customers for tailor-made development. The MCD series is also available with OEM seed laser drivers.

Key Features

- ◆ Pulse width down to 300ps
- ◆ Single pulse energy up to 100μJ
- ◆ Repetition rate up to 0.1kHz
- ◆ Spatial mode TEM₀₀
- ◆ Polarization-stable

Technical Specifications

Applications

- Seed laser
- Micromachining
- Laser-induced breakdown spectroscopy (LIBS)
- Laser ionization mass spectroscopy (LIMS)
- Laser-induced fluorescence (LIF)
- Nonlinear optics



Optical Parameters					
Wavelength (nm)	1064	532	355	266	
Repetition rate (kHz)	0.1	0.1	0.1	0.1	
Average power (mW)	10	3	1.5	0.5	
Pulse energy (μJ)	100	30	15	5	
Pulse width (ps)	350	300	300	300	
Power stability (8h)	±3%				
Beam profile	TEM ₀₀				
Beam full divergence (typ., mrad)	Horizontal @1/e ²	12	10	8	8
	Vertical @1/e ²	12	10	8	8
Polarization ratio	>100:1				
System Parameters					
Supply power voltage	100-240 VAC, 50/60 Hz				
Control interface	RS232, USB				
Power consumption (W)	≤25				
Power dimensions (W×H×L,mm)	168×88×140				
Laser dimensions (W×H×L,mm)	45×30×120				
Operation temperature (°C)	15-35				
Storage temperature (°C)	0-60				

1. Please see mechanical drawings for more details.
2. Built-in beam expander and collimator are available upon request, and divergence can be less than 2mrad.
3. OEM seed laser drivers are available.
4. As products are constantly being updated, the right of final interpretation of technical specifications or illustrations in datasheet belongs to RealLight.


Order Information

Wavelength (nm)	Part Number	Repetition rate (kHz)	Pulse energy (μJ)
1064	MCD-1064-0.1-100	0.1	100
532	MCD-532-0.1-030	0.1	30
355	MCD-355-0.1-015	0.1	15
266	MCD-266-0.1-005	0.1	5

Part Numbering Schema

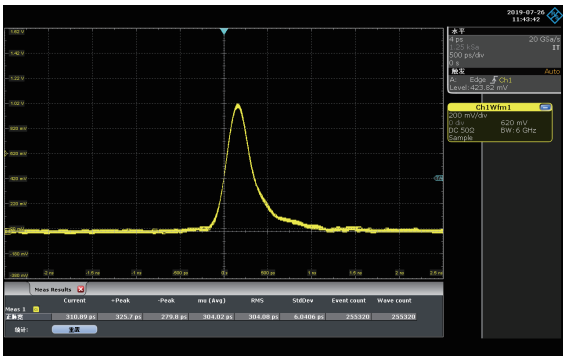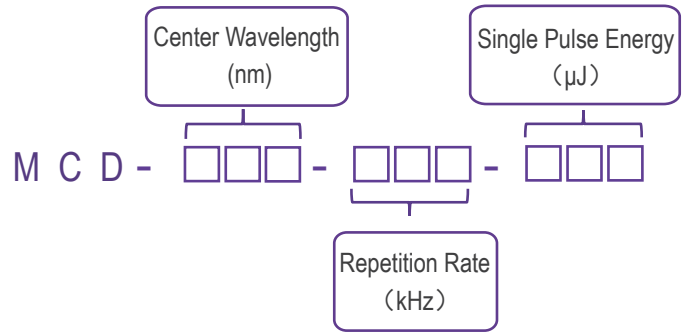


Typical Pulse

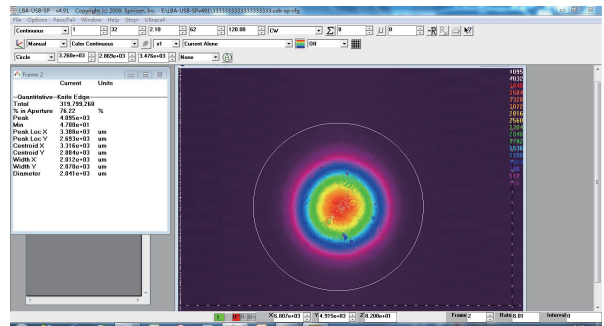


Beam Profile


Mechanical Drawings (in mm)

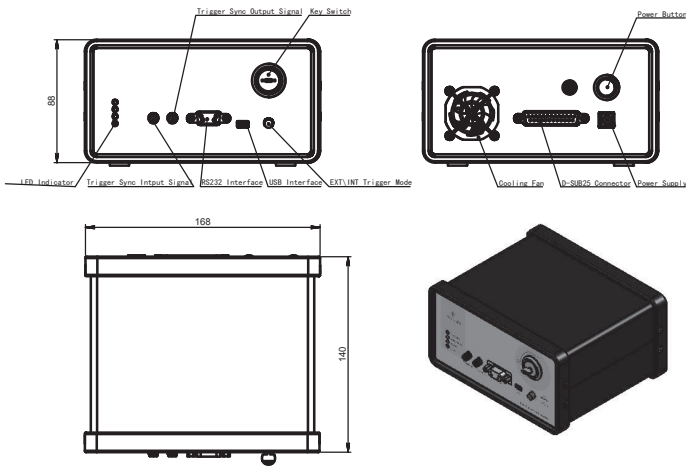

Power Supply

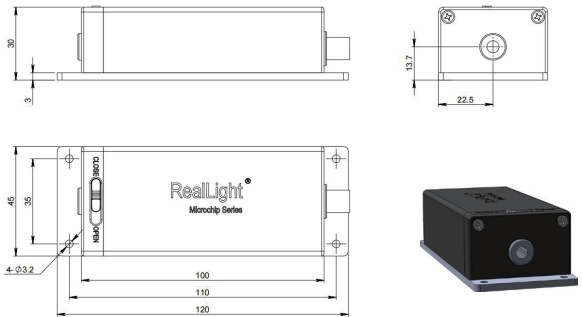

Laser Head (middle laser outlet)

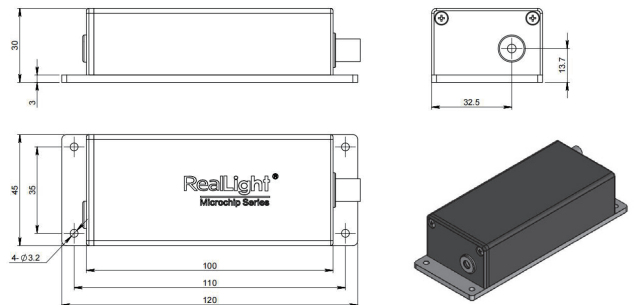

Laser Head (side laser outlet)

