

# NLMO Series Multi-mode Narrow Linewidth Laser




## Key Features

- ◆ Excellent wavelength stability  $\pm 7\text{pm}@4\text{h}$
- ◆ Power stability  $< \pm 2\%$
- ◆ Low power consumption, typical  $< 5\text{W}$
- ◆ Compact design, easily integrated


## Applications

- Raman spectroscopy
- Laser-induced fluorescence

## Technical Specifications

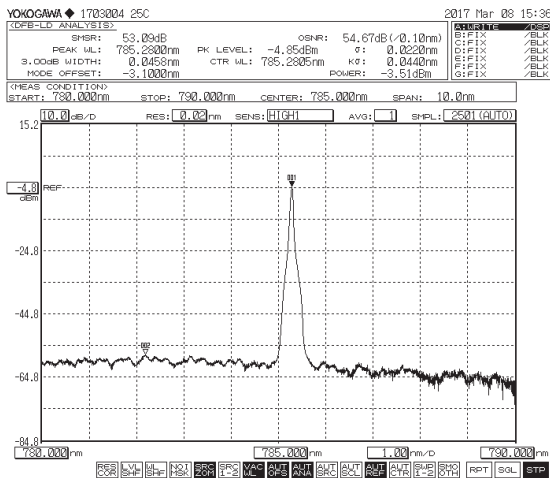

785nm laser spectrum (SMSR > 40dB)

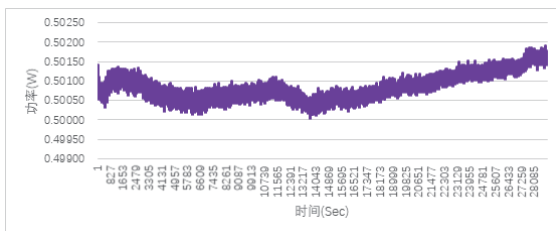

785nm power stability@4h

Optical Parameters						
Center Wavelength (nm)	638	785	808	830	976	1064
Output Power (mW)	500	600	600	600	800	800
Wavelength Tolerance (nm)	$\pm 0.5$					
Linewidth (nm)	<0.1	<0.1	<0.3	<0.1	<0.3	<0.1
Wavelength Stability	$\pm 7\text{pm}@4\text{h Typ.}$					
Power Stability	$\pm 2\% @4\text{h Typ.}$					
SMSR	>35	>40				
System Parameters						
Adjustability % Full Power	0~100%					
Warm up Time (min)	15					
Control Interface	PH2.0-10P , USB					
Connector	FC/PC, SMA905					
Output Fiber	105 $\mu\text{m}$ , 0.22 NA					
Supply Voltage	5V DC @ 2 A					
Power Consumption	<5W Typ.					
Storage Humidity	0~80% RH					
Storage Temperature ( $^{\circ}\text{C}$ )	0~55					
Operating Temperature ( $^{\circ}\text{C}$ )	10~35 (heat sink is required)					
Weight (g)	<150					
Dimensions (mm)	76.2×63.5×22					

