


R4M Diode Laser Components

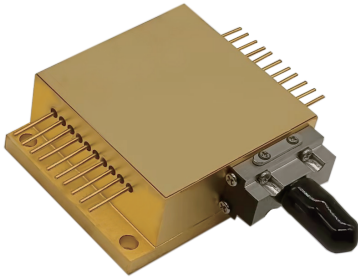

R4M diode laser components are Reallight's AW series multi-function laser modules, providing multi-wavelength output with 2-4 emitters integrated. These fiber detachable lasers are equipped with fiber detector, photodiode, thermistor and replaceable window.

Key Features

- ◆ Superior power stability
- ◆ Excellent beam quality
- ◆ Efficient heat dissipation
- ◆ High reliability
- ◆ Different-wavelength combinations available

Applications

- Aesthetic medicine
- Material processing

Technical Specifications (25°C)

Package Type		R4M																												
		4-wavelength																3-wavelength												
Center Wavelength (nm)		660/808/980/1064				638/808/980/1064				638/808/980/1064				638/808/915/980				450/638/980/1064				450/638/980				450/638/808				
Optical	CW Output Power / P _{op} (W)	1.2	8.5	10	10	0.2	8.5	10	10	0.5	8.5	10	10	0.2	8.5	10	10	4	0.5	10	10	4	0.5	10	4	0.5	10	4	0.5	8.5
	Wavelength Tolerance (nm)	±10																												
	Spectral Width / Δλ (nm)	<6																												
	Temperature Drift of Wavelength / Δλ/ΔT (nm/°C)	0.3																												
Electrical	Threshold Current / I _{th} (A)	0.5	1.2	0.4	1.2	0.2	1.2	0.4	1.2	0.5	1.2	0.4	1.2	0.2	1.2	0.4	1.2	0.32	0.5	0.6	1.2	0.32	0.5	0.6	0.32	0.5	1.2	0.32	0.5	1.2
	Operating Current / I _{op} (A)	2	13	13	14	0.5	13	13	14	1.2	13	13	14	0.5	13	13	14	3.5	1.2	12	13	3.5	1.2	12	3.5	1.2	12	3.5	1.2	11
	Operating Voltage / V _{op} (V)	2.2	2.2	1.8	1.8	2.2	2.2	1.8	1.8	2.4	2.2	1.8	1.8	2.2	2.2	1.8	1.8	5	2.3	1.8	1.8	5	2.3	1.8	5	2.3	1.8	5	2.3	2
	Slope Efficiency / η _{es} (W/A)	0.8	1	0.9	0.8	0.8	1	0.9	0.8	0.8	1	0.9	0.8	0.8	1	0.9	0.8	1.2	0.9	1	0.9	1.2	0.9	1	1.2	0.9	1	1.2	0.9	1
	PD Parameter / I _{pd} (μA)	<3000																												
	Thermistor / Rt (kΩ/β (25°C))	10±5%/3450																												
Fiber	Fiber Core Diameter / D _{core} (μm)	200								400								200												
	Fiber Cladding Diameter / D _{clad} (μm)	220								440								220												
	Fiber Coating Diameter / D _{buffer} (μm)	400								720								400												
	Numerical Aperture / NA	0.22																												
	Connector	SMA905																												

1. All the data in the above table are the typical values obtained from the tests at room temperature of 25°C, and the final data is subject to the final test report.


Other Parameters

Parameter	Operating Temperature /°C	Operating Relative Humidity /%	Storage Temperature /°C	Storage Relative Humidity /%	Lead Soldering Temperature (max/°C)
Min	10	-	-20	-	-
Max	30	75	70	90	250(10Sec.)

Order Information

Package	Wavelength (nm)	Output Power(W)	Part Number
R4M	660/808/980/1064	1.2/8.5/10/10	R660/808/980/1064±10-1.2/8.5/10/10WD-R4M-PFS
	638/808/980/1064	0.2/8.5/10/10	R638/808/980/1064±10-0.2/8.5/10/10WD-R4M-PFS
	638/808/980/1064	0.5/8.5/10/10	R638/808/980/1064±10-0.5/8.5/10/10WD-R4M-PFS
	638/808/915/980	0.2/8.5/10/10	R638/808/915/980±10-0.2/8.5/10/10WD-R4M-PFS
	450/638/980/1064	4/0.5/10/10	R450/638/980/1064±10-4/0.5/10/10WD-R4M-PFS
	450/638/980	4/0.5/10	R450/638/980±10-4/0.5/10WD-R4M-PFS
	450/638/808	4/0.5/8.5	R450/638/808±10-4/0.5/8.5WD-R4M-PFS

Part Numbering Schema



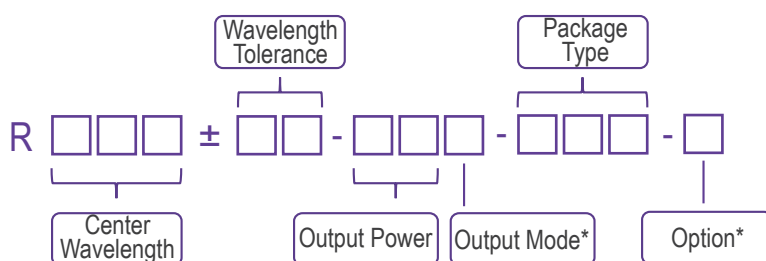


*Output Mode: D - Fiber Detachable

*Option: P - Pilot Light

FS - Fiber Detector

Mechanical Drawings (in mm)

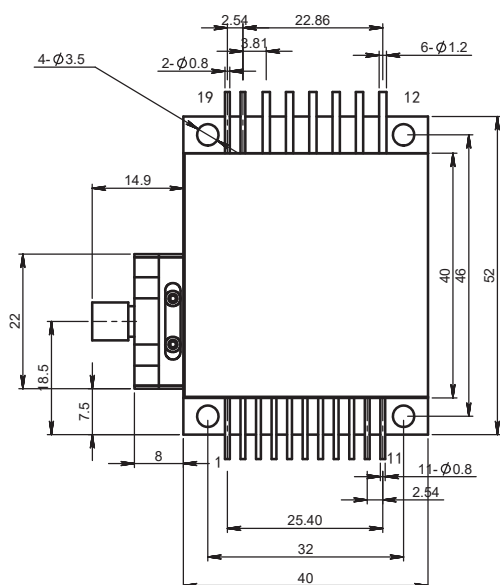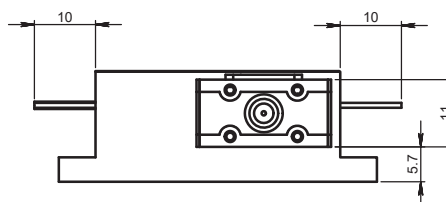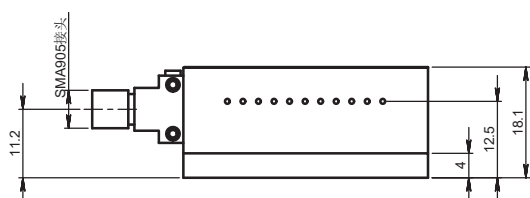

Pin	Function	Pin	Function
1	Fiber Detector PD (P)	12	LD1(+)
2	Fiber Detector LED (+); Fiber Detector PD (N)	13	LD1(-)
3	Fiber Detector LED (-)	14	LD2(+)
4	PD(P)	15	LD2(-)
5	PD(N)	16	LD3(+)
6	-	17	LD3(-)
7	-	18	LD4(+)
8	-	19	LD4(-)
9	-	20	LD5(+)
10	Thermistor	21	LD5(-)
11	Thermistor		

